


# Video Matrix Switch

4 In/4 Out- Any Combination Goes



## Diagram

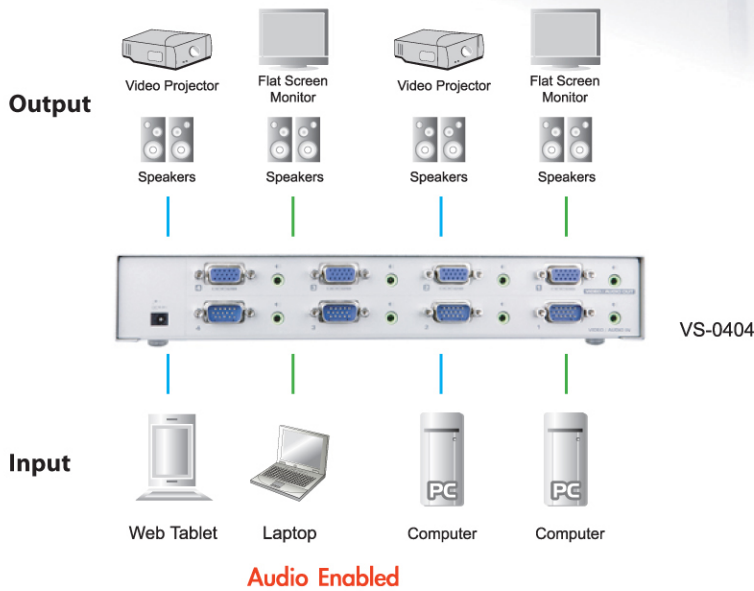

Model: **VS-0404**

## Features

- Match any input to any output
- Outputs can be selected by using front panel push buttons
- Cascadable to other ATEN video splitters
- Stereo audio enabled
- Supports high resolution- up to 1920 x 1440@70Hz
- Separate the Video Matrix and monitors by up to 65m

## Specifications

Model	VS-0404	
PC - Monitor Connection	4 - 4	
Connectors	Out	4 x HDB-15 (female) 4 x 3.5mm ministereero jack (female)
	In	4 x HDB-15 (male) 4 x 3.5mm ministereero jack (female)
	Power	DC Jack
	LEDs	Power Activity 1 Activity 2 Activity 3 Activity 4 Video1 ~ 4
Push Buttons	4	
VGA Resolution	1920 x 1440 @70Hz (1.8m)	
VGA DDC2B Support	All Ports	
Signal Type	VGA / SVGA / XGA	
Sync Range	Sync Positive/Negative	
Power Consumption	DC5.3V, 12W	
Cable Distance	65 meters maximum (Video Matrix to monitor)	
Operating Temperature	0°~ 50°C (0 ~ 80% RH, Non-condensing)	
Storage Temperature	-20°~ 60°C (0 ~ 80% RH, Non-condensing)	
Enclosure	Metal	
Weight	890g	
Dimensions (LxWxH)	20 x 7.7 x 4.6 cm	

**DEFF**

IMPORTADORA

[www.deffimportadora.com.br](http://www.deffimportadora.com.br)

**DEFF Distribuidora Importação e Exportação Ltda.**  
R. Cristóvão Gonçalves, 44 Pinheiros - São Paulo/SP  
Tel: (11) 3814-4345 E-mail: [deff@deffimportadora.com.br](mailto:deff@deffimportadora.com.br)

**ATEN**<sup>®</sup>  
[www.aten.com](http://www.aten.com)

**ATEN International CO., Ltd.**

3F, No.125, Sec.2, Datung Rd., Shijr City, Taipei, Taiwan 221 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767 <http://www.aten.com> E-mail: [online@aten.com.tw](mailto:online@aten.com.tw)

© Copyright 2005 ATEN® International Co., Ltd. All brand names and trademarks are the registered property of their respective owners.